







More Precision.

indu**SENSOR** // Linear inductive displacement sensors





-  **Ideal for serial applications in machine building and automation**
-  **High resolution and linearity**
-  **User-friendly set up and configuration via buttons or software**
-  **Multi-channel capability & synchronous operation**
- INTER FACE** **Analog (U/I) / RS485 / PROFINET / EtherNet/IP**

The MSC7602 controller is designed to be operated with measuring gauges and displacement sensors of the DTA (LVDT) and LDR (half-bridge sensors) series. A large variety of compatible, inductive displacement sensors and gauges from Micro-Epsilon combined with an optimized price/performance ratio opens up numerous fields of applications in automation technology and machine building.

Users can either choose the symmetrical adjustment around the zero point in order to make optimum use of the specific advantages of differential sensors, or teach in two almost arbitrary points within the measuring range. If desired, these settings can be made at the factory and documented with a manufacturer test certificate.

The controller is ideally suited to multi-channel applications. The bus connector on the rear side significantly reduces wiring effort. The controller can be easily set up via buttons/LEDs or software.



Easy "click-fit" installation with DIN rail

Long measurement chains with up to 64 subscribers/bus



| Model | MSC7602 | |
|---------------------------------|--|---|
| Resolution ¹⁾ | DTA series | 13 bits (0.012 % FSO) at 50 Hz 12 bits (0.024 % FSO) at 300 Hz |
| | LDR series | 12 bits (0.024 % FSO) at 50 Hz 11 bits (0.048 % FSO) at 300 Hz |
| Frequency response (-3dB) | 300 Hz (adjustable only via software) | |
| Linearity | ≤ ±0.02% FSO | |
| Temperature stability | DTA series | ≤ 100 ppm FSO/K |
| | LDR series | ≤ 125 ppm FSO/K |
| Supply voltage | 14 ... 30 VDC (5 ... 30 VDC ²⁾) | |
| Max. current consumption | 80 mA | |
| Input impedance ³⁾ | > 100 kOhm | |
| Digital interface | RS485 / PROFINET ⁴⁾ / EtherNet/IP ⁴⁾ | |
| Analog output ⁴⁾ | (0)2 ... 10 V; 0.5 ... 4.5 V; 0 ... 5 V (R _a > 1 kOhm) or 0(4) ... 20 mA (load < 500 ohm) | |
| Connection | Sensor: screw terminal AWG 16 to AWG 28 Supply/signal: screw terminal AWG 16 to AWG 28 Supply/Sync/RS485: DIN rail bus connector | |
| Mounting | DIN rail 35 mm | |
| Temperature range | Storage | -40 ... +85 °C |
| | Operation | -40 ... +85 °C |
| Shock (DIN EN 60068-2-27) | 5 g / 6 ms in 6 axes, 1000 shocks each 15 g / 11 ms in 6 axes, 10 shocks | |
| Vibration (DIN EN 60068-2-6) | ±2 mm / 10 ... 15.77 Hz in 3 axes, 10 cycles each ±2 g / 15.77 ... 2000 Hz in 3 axes, 10 cycles each | |
| Protection class (DIN EN 60529) | IP20 | |
| Material | Polyamide | |
| Weight | approx. 120 g | |
| Compatibility | full-bridge sensor/LVDT (DTA series) and half-bridge sensor (LDR series) | |
| No. of measurement channels | 2 | |

FSO = Full Scale Output

¹⁾ Noise: AC RMS measurement via RC low-pass filter of the 1st order with $f_c = 5$ kHz


²⁾ With technical restrictions of the output signal (load and signal span)

³⁾ Sensor side

⁴⁾ Connection via interface module (see accessories)

⁵⁾ $0\text{ V} \triangleq < 30\text{ mV}$, $0\text{ mA} \triangleq < 35\text{ }\mu\text{A}$; with controllers including a current output, the output signal is limited to approx. 21 mA

MSC7602

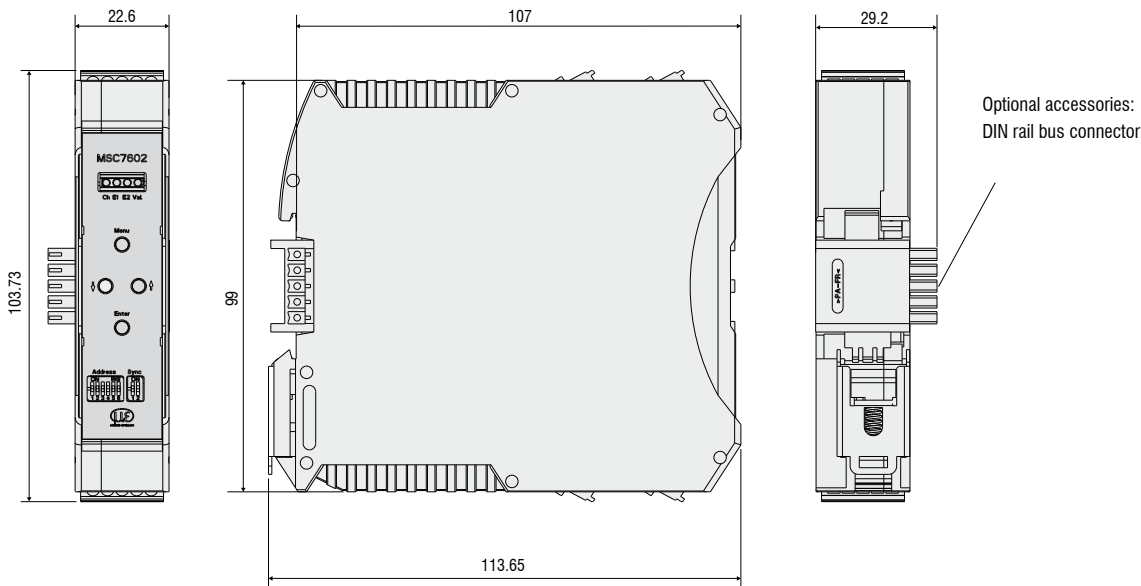

Dimensions in mm, not to scale

Accessories for MSC7401 / MSC7602 / MSC7802

Connection cables

- PC7400-6/4 Supply and output cable, 6 m
- PC5/5-IWT Supply and output cable, 5 m (only MSC7401 / MSC7802)
- IF7001 Single-channel USB/RS485 converter for MSC7xxx
- MSC7602 connector kit



MSC7602 connector kit

Service

Connection, adjustment and calibration including manufacturer certificate


Interface modules

- IF2030/ENETIP DIN rail interface module for Ethernet/IP (multi-channel)
- IF2030/PNET DIN rail interface module for ProfiNet (multi-channel)
- IF1032/ETH Interface module for Ethernet/EtherCAT (single channel) (only MSC7401 / MSC7802)

Power supply units

- PS2401/100-240/24V/1A Universal power supply unit with open ends

Connection options MSC7401

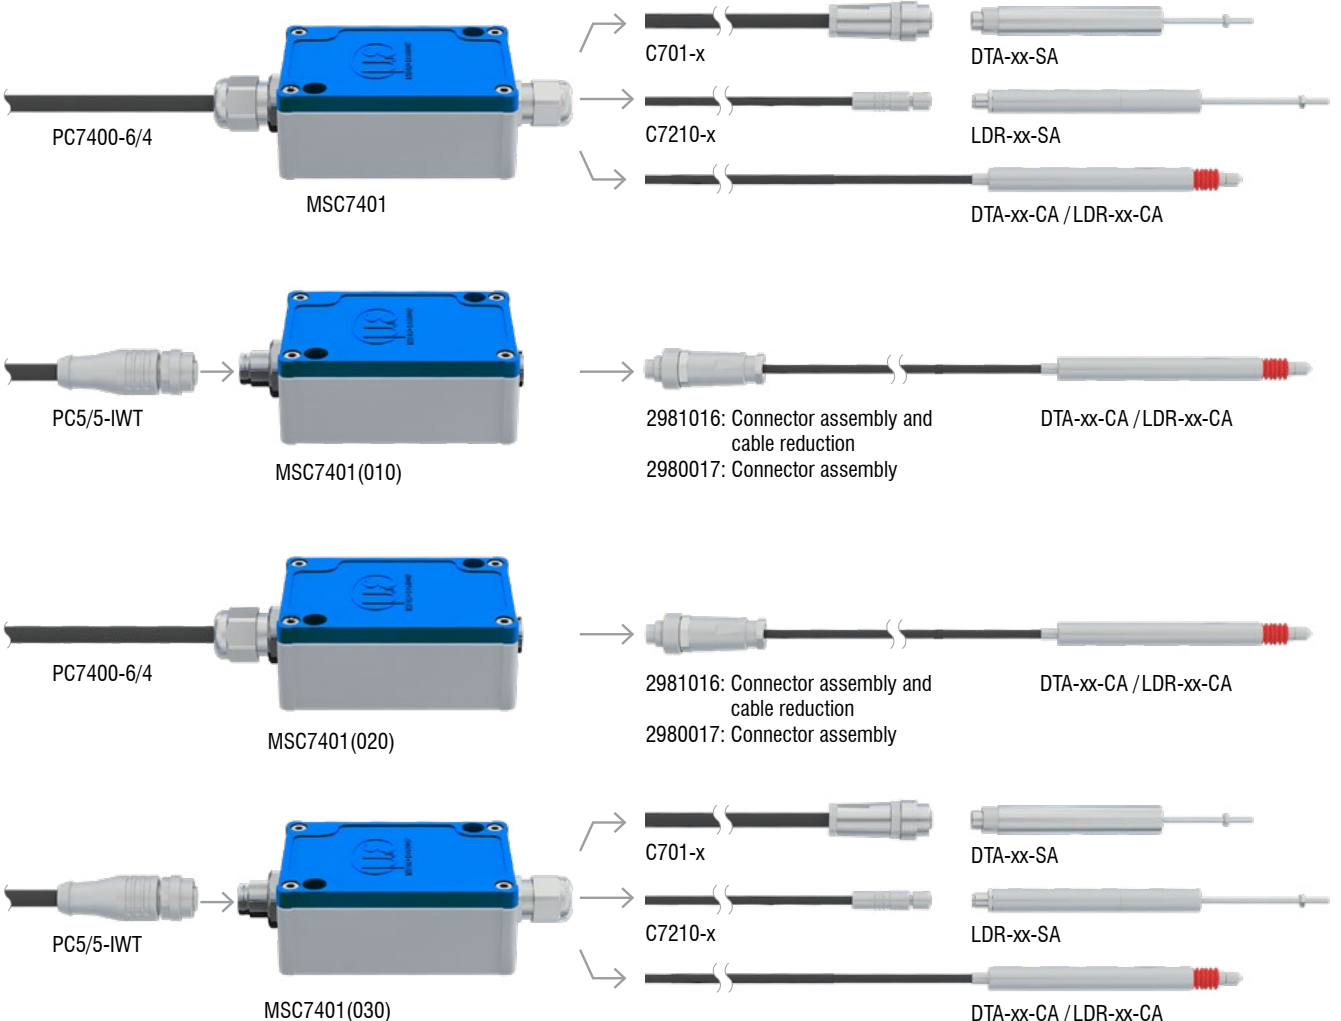

Sensors and Systems from Micro-Epsilon



Sensors and systems for displacement, distance and position



Sensors and measurement devices for non-contact temperature measurement



Measuring and inspection systems for metal strips, plastics and rubber



Optical micrometers and fiber optics, measuring and test amplifiers



Color recognition sensors, LED analyzers and inline color spectrometers



3D measurement technology for dimensional testing and surface inspection